


型号说明 Ordering Information

PBS-10B-2

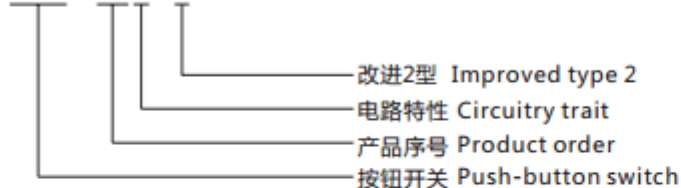

技术特性 Specification

- 1.规格 Rating:3A 125VAC;1A 250VAC
- 2.接触电阻 Contact Resistance:20mΩ max
- 3.绝缘电阻 Insulation Resistance:500VDC 100MΩ min
- 4.耐电压 Dielectric Strength:1000VAC, 1Minute
- 5.操作温度 Operating Temperature:-25°C ~ +85°C
- 6.电气寿命 Electrical Life:50,000 Cycles

电路特性 Circuitry trait

| | | | |
|------------------------------|------------|------------------|-----------------------|
| A | ON - OFF | Push on/Push off | With lock |
| B | (ON) - OFF | Push on | Momentary(Open type) |
| C | ON - (OFF) | Push off | Momentary(Close type) |
| ():回弹指示 Indicates Momentary | | | |

按钮颜色 Push-button color

| | |
|-----------|----------|
| 红 Red | 白 White |
| 绿 Green | 黑 Black |
| 桔黄 Orange | 黄 Yellow |
| 蓝 Blue | |

| | | |
|--|---|--|
| | <p>PBS-13B OFF-(ON) PBS-13C ON-(OFF) 8A 125VAC; 4A 250VAC</p> | |
| | <p>WPC-13 M12 x 0.75</p> | |
| | <p>PBS-10B OFF-(ON) (Plastic rod)</p> | |
| | <p>PBS-10B-2 OFF-(ON) PBS-10C-2 ON-(OFF) (Metal rod)</p> | |
| | <p>PBS-15A ON-OFF</p> | |